

JM PLUS

PV MODULE

JMP-530W-M1072H-GWW/WB 530W
JMP-535W-M1072H-GWW/WB 535W
JMP-540W-M1072H-GWW/WB 540W
JMP-545W-M1072H-GWW/WB 545W
JMP-550W-M1072H-GWW/WB 550W



KEY FEATURES

1500

High Voltage

UL and IEC 1500V certified; lowers BOS costs and yields better LCOE



High Efficiency

Higher module conversion efficiency benefit from half cell structure (low resistance characteristic).



PID Resistance

Excellent Anti-PID performance guarantee limited power degradation for mass production.



Low-light Performance

Advanced glass and cell surface textured design ensure excellent performance in low-light environment.



Severe Weather Resilience

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).




Durability Against Extreme Environmental Conditions

High salt mist and ammonia resistance certified by TUV SUD.

IEC61215
IEC61730
UL61215
UL61730



WARRANTY

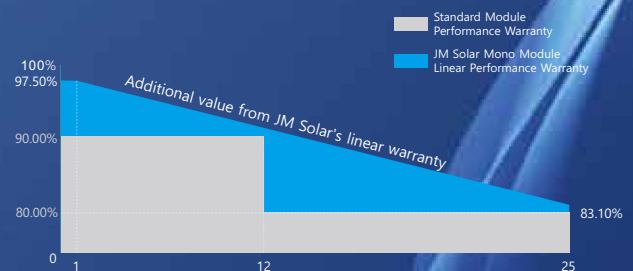

25 25-years Linear Performance Warranty

12 12-years Product Material & Workmanship

